
Refrigerated Snack Counters, GN 2/1

(Depth 800 mm / Height 637 mm)

Model: KUM / KUO

Ident.-No.: 3913 / 3915

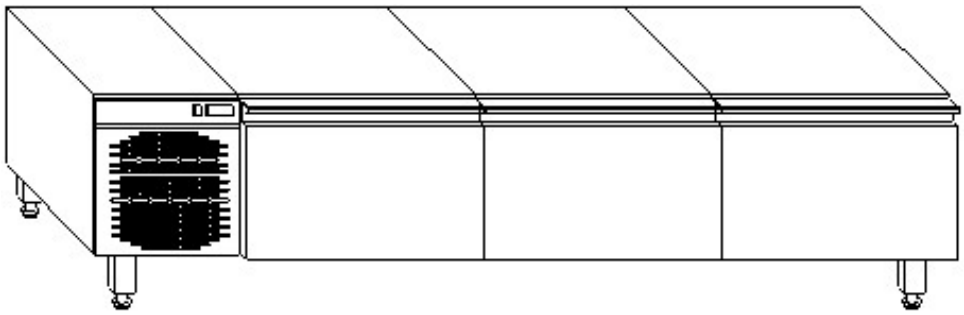

Models with plug-in cooling unit (Refrigerant R 134a)

Model No.	Compart-ments	Length (mm)	Connected load (W)	Cold performance* (W)	Quantity of refrigerant (kg)
KUM 180	GN 1x2/1	1305	330	230	0.14
KUM 280	GN 2x2/1	1860	330	350	0.24
KUM 380	GN 3x2/1	2515	650	510	0.35

Models for the connection to a remote cooling unit

Model No.	Compart-ments	Length (mm)	Connected load (W)	Cold needed* (W)
KUO 180	GN 1x2/1	955	20	230
KUO 280	GN 2x2/1	1510	20	350
KUO 380	GN 3x2/1	2165	40	510

*** at –10°C evaporation temperature**

Specification

- with electronic temperature control, on/off switch, hi-lo alarm, defrost indicator, compressor running indicator, adjustable operating temperature
- automatic defrost and condensate evaporating by hot gas (only with plug-in cooling unit), with remote cooling unit over condensation water discharge
- with coated evaporator
- worktop made of stainless steel AISI 304
- counter body inside and outside made of stainless steel AISI 304, double walled
- easy to clean by smooth insides
- self–closing doors and exchangeable magnet seals
- environment-friendly by CFC-free refrigerants and insulation

Technical data

Electrical connection:	230 V
Fuse by others:	16 A
Connection terminal:	2.5 mm²
Protective system:	IP X5

Details on the air sound

Workplace-related emission value: <70 dB (A)

We reserve the right to change specifications without notice!